Destructor Junior™

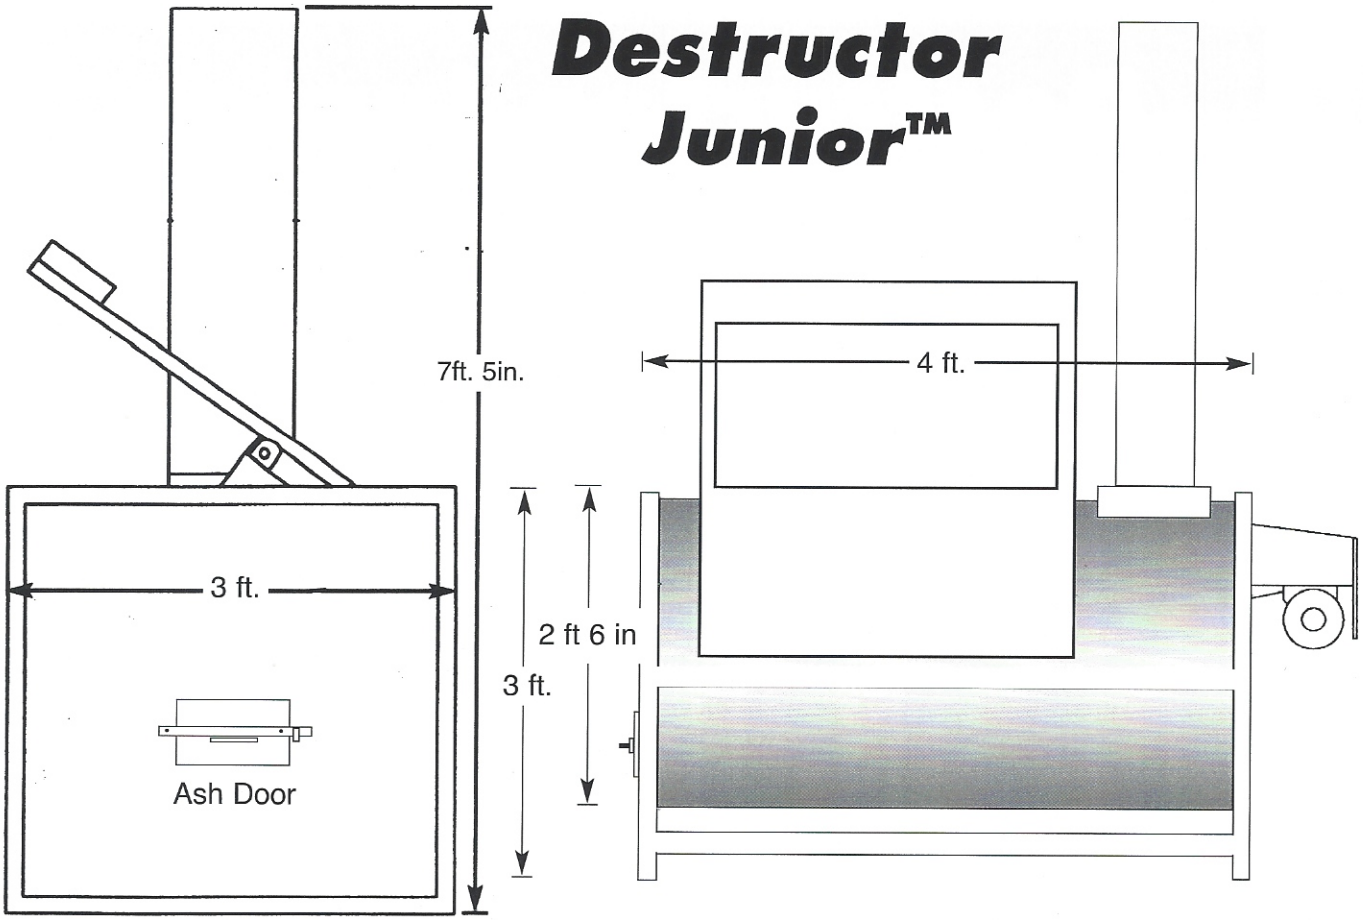

Electrical & Gas Specifications

Customer to connect power and gas to unit. Customer also to furnish pad for incinerator.

Power: 115V

Natural Gas: 12'' to 14'' W.C. gas pressure
Minimum 1-1/2'' gas pipe

LP Gas: Low pressure 7' to 8'
Minimum 1/2'' gas pipe

Oil Gas: #2 Diesel

Warranty

National Incinerator, Inc. guarantees all materials and workmanship used in the construction of its incinerator and the refractory for a one year period from the date of installation. Seller shall not be liable for any injury or damages to person or property or any other incidental or consequential damages.

Specifications

Height: 7'5'' ***Length:*** 4' ***Width:*** 3'

Weight: 2,250 lbs

Metal: 11 gauge ***Lining:*** 3'' 3000° refractory

Charge Door: *OD:* 31" x 20-3/4''
ID: 24-1/2" X 14 1/2"
Lining: 3'' 3,000° refractory

Stack: 4'
2'' refractory lining

Ash Door: 4'' x 6'' ***Lining:*** 4'' 3000° refractory

Grates: Metal or refractory grates available

Burners: 100,000 BTU incinimite with cover
Second burner available upon request

Clean-out Rod: 54'' long ***Timer:*** 60 minute

NATIONAL INCINERATOR INCORPORATED
P.O. BOX 266
BOAZ, AL 35957
(205) 589-6720 • FAX (205) 589-2326
sales@nationalincinerator@com

REV. 01/20